



智能薄膜包装机系列

INTELLIGENT FILM PACKAGING MACHINE SERIES

瑞安市新元包装机械有限公司

浙江猛牛智能机械有限公司

广东新纪元包装机械有限公司

广州新纪元智能装备有限公司

江西新纪元国际包装有限公司

赣州金瑞利智能科技有限公司

温州生产基地地址：温州市瑞安市塘下镇罗凤双桥园区南路3号内

Wenzhou Production Base Address: No. 3 Yuanqu South Road, Luofeng, Tangxia Town, Ruian, Wenzhou City, Zhejiang Province

广州生产基地地址：广州市花都区狮岭镇前进村龙泉西路5号

Guangzhou Production Base Address: No. 5, Longquan West Road, Qianjin Village, Shiling Town, Huadu District, Guangzhou City, Guangdong Province

赣州生产基地地址：赣州市经开区新能源科技城新纪元国际产业园

Ganzhou Production Base Address: New Era International Industrial Park, New Energy Science and Technology City, Economic Development Zone, Ganzhou City

全国免费服务热线（Hotline）：4008-520-889

瑞安市新元包装机械有限公司

RUIAN XINYUAN PACKAGING MACHINERY CO.,LTD

广州新纪元智能装备有限公司

GUANG ZHOU XIN JIYUAN INTELLIGENT EQUIPMENT CO.,LTD

江西新纪元国际包装有限公司

JIANGXI XINJIYUAN INTERNATIONAL PACKAGING CO.,LTD

公司简介 Company profile



瑞安市新元包装机械设备有限公司，始创于2003年的新元包装机械销售服务点；2004-2006年先后在温州增设5家直营连锁店；2006年投入机械加工设备开始制造包装机械；2011年成立瑞安市新元包装机械设备有限公司同期新元商标注册成功，公司专注于制造薄膜封切机、袖口式套膜、枕式包装机、热收缩包装机的研发制造、营销服务，产品广泛应用于各个行业的产品薄膜包装及热收缩膜包装，公司2015年获批通过ISO9001国际质量体系认证，CE欧盟认证，2020年荣获国家高新技术企业。

为更好更快的服务于珠江三角洲的市场，2019年增设广州新纪元智能装备有限公司，2022年荣获国家高新技术企业。2022年再次扩大经营增设赣州新纪元国际包装有限公司。

目前三家公司生产车间达6万多平米，年产薄膜封切包装+热收缩包装成套设备50000台套，是薄膜封切包装领域全国领先企业。产品销售渠道已形成国内经销商1000多家（其中品牌代理商百余家）并出口50多个国家。

公司愿景：让智能更简单，成为智能包装界的“小米”

Ruian Xinyuan Packaging Machinery Equipment Co., Ltd. was founded in 2003 as a Xinyuan Packaging Machinery Sales Service Point; from 2004 to 2006, 5 direct-operated chain stores were added in Wenzhou; in 2006, mechanical processing equipment was invested to start manufacturing packaging machinery; Ruian Xinyuan Packaging Machinery Equipment Co., Ltd. was established in 2011, and the Xinyuan trademark was successfully registered at the same time. The company focuses on the research and development, manufacturing, and marketing services of film sealing and cutting machines, cuff-type sleeves, pillow-type packaging machines, and heat shrink packaging machines. The products are widely used in product film packaging and heat shrink film packaging in various industries. The company was approved for ISO9001 international quality system certification and CE EU certification in 2015, and won the National High-tech Enterprise in 2020.

In order to better and faster serve the market in the Pearl River Delta, Guangzhou New Era Intelligent Equipment Co., Ltd. was added in 2019, and won the National High-tech Enterprise in 2022.

In 2022, the business was expanded again to add Ganzhou New Era International Packaging Co., Ltd. At present, the three companies have a production workshop of more than 60,000 square meters, with an annual output of 50,000 sets of film sealing and cutting packaging & heat shrink packaging equipment. They are the leading enterprises in the field of film sealing and cutting packaging in China. The product sales channels have formed more than 1,000 domestic distributors (including more than 100 brand agents) and exported to more than 50 countries.

Company vision: Make intelligence simpler and become the "Xiaomi" in the field of smart packaging.

XY400ZQJ 全自动智能覆膜切角热收缩包装机

AUTOMATIC INTELLIGENT FILM LAMINATING AND CORNER CUTTING HEAT SHRINK WRAPPING MACHINE



扫码看视频

收缩效果360° 无皱折

XY400ZQJ



产品说明:

全自动覆膜切角热收缩包装机用于各类产品包装盒覆膜后切四角热收缩包装、主要是针对各种高端产品盒的外包装进行最终切角工艺提升外观美观度，采用非标自动化技术对产品包装盒进行切角后热收缩包装。全自动套膜切角包装，收缩效果360° 无皱折。

产品主要应用于：医药盒、食品盒、保健品盒、化妆品盒、茶叶盒、手机盒、手机电池盒、移动电源盒、数据线盒、平板电脑盒等一切需要覆膜的产品，可以起到防湿、防潮、美观的作用，同时保证产品内在物品的完整。

Product Description:

The fully automatic laminating and corner cutting heat shrink packaging machine is used for all kinds of product packaging boxes to cut the four corners and heat shrink packaging after laminating. It is mainly used for the final corner cutting process of the outer packaging of various high-end product boxes to improve the appearance. It uses non-standard automation technology to cut the corners of the product packaging boxes and then apply heat shrink packaging. Fully automatic film warpping and corner cutting packaging, 360° shrinkage effect without wrinkles.

The product is mainly used in: medicine boxes, food boxes, health care product boxes, cosmetic boxes, tea boxes, mobile phone boxes, mobile phone battery boxes, mobile power boxes, data cable boxes, tablet computer boxes and other products that need to be laminated. It can play a role in moisture-proof, moisture-proof and beautiful, while ensuring the

型 号 MODEL		XY250ZQJ	XY400ZQJ
包装尺寸 Packing Size	长/L	100-250mm	100mm-400mm
	宽/W	90-200mm	90-350mm
	高/H	30-150mm	30-150mm
膜宽带需满足 Film Size		≥L+H+(50-80mm)	≥L+H+(50-80mm)
产品需满足 W+H Limit		≤350mm	≤400mm
出料高度 Outfeed Conveyor Height		950mm	950mm
入料高度 Infeed Conveyor Height		870mm	870mm
电源电压 (V-Hz) Voltage		单相 AC220 20A 50HZ	单相 AC220 20A 50HZ
功率 (Kw) Power		5.5Kw	5.5Kw
使用气源 Air source		0.5-0.7Mpa	0.5-0.7Mpa
整机重量 Weight		约1800kg	约2000kg
封切温度 Sealing Temperature		170-260℃	170-260℃
机器尺寸 (L × W × H) Machine Dimensions		L2100mm × W1400mm × H1800mm(可走货梯)	L2900mm × W1620mm × H1860mm(含皮带)
生产效率 Production efficiency		720-900包/h	600-720包/h

CZL450S

全自动垂直封切机(上放膜)
AUTOMATIC VERTICAL SEALING AND CUTTING MACHINE (HIGH FILM CRADLE)



CZL450S



CZL450S+BSN4522G



产品说明:

全自动垂直L型封切包装机是我公司最新研发生产的崭新品牌系列机型，它吸纳国内外先进的技术经验，是集科技、适用、品质于一体的新机型，是广泛应用于各类需要热收缩包装的理想设备。本系列机型采用大品牌元器件，使用进口高精度传感器和精密电机，机器使用寿命长，包装效率高，包装能力强。配备智能触控一体屏，操作界面简洁明了，调节简单方便，员工易操作上手。

Product description:

The fully automatic vertical L-shaped sealing and cutting packaging machine is a brand-new series of models developed and produced by our company. It absorbs advanced technical experience from home and abroad. It is a new model that integrates technology, applicability and quality. It is an ideal equipment widely used in various types of heat shrink packaging. This series of models adopts big brand components, imported high-precision sensors and precision motors. The machine has a long service life, high packaging efficiency and strong packaging capacity. It is equipped with an intelligent touch-screen system, with a simple and clear operation interface, simple and convenient adjustment, and easy for employees to operate.

CZL450D

全自动垂直封切机(下放膜)
AUTOMATIC VERTICAL SEALING AND CUTTING MACHINE (LOW FILM CRADLE)



CZL450D



CZL450D+BSN4522G+LS450D



产品说明:

全自动垂直L型封切包装机是我公司最新研发生产的崭新品牌系列机型，它吸纳国内外先进的技术经验，是集科技、适用、品质于一体的新机型，是广泛应用于各类需要热收缩包装的理想设备。本系列机型采用大品牌元器件，使用进口高精度传感器和精密电机，机器使用寿命长，包装效率高，包装能力强。配备智能触控一体屏，操作界面简洁明了，调节简单方便，员工易操作上手。整机采用下放膜结构，上下膜更方便。

Product description:

The fully automatic vertical L-shaped sealing and cutting packaging machine is a brand-new series of models developed and produced by our company. It absorbs advanced technical experience from home and abroad. It is a new model that integrates technology, applicability and quality. It is an ideal equipment widely used in various types of heat shrink packaging. This series of models adopts big brand components, imported high-precision sensors and precision motors. The machine has a long service life, high packaging efficiency and strong packaging capacity. It is equipped with an intelligent touch-screen system, with a simple and clear operation interface, simple and convenient adjustment, and easy for employees to operate. The whole machine adopts a low film cradle structure, which makes it more convenient to replace different films.

型 号 MODEL	CZL450S	CZL550S	CZL650S	CZL750S
电源电压 (V-Hz) Voltage	220V/50-60Hz	220V/50-60Hz	220V/50-60Hz	220V/50-60Hz
使用气源air source	6.0-8.0kg/cm ²	6.0-8.0kg/cm ²	6.0-8.0kg/cm ²	6.0-8.0kg/cm ²
功率 (Kw) Power	1.6KW	1.96KW	2.16KW	2.36KW
包装速度Packaging speed	25-40pcs/min	25-40pcs/min	20-35pcs/min	15-30pcs/min
包装产品高度Packaged product height	≤150mm	≤200	≤250	≤300
最大包装尺寸 L+H Maximum package size	≤450mm	≤600	≤700	≤800
最大包装尺寸 W+H Maximum package size	≤370mm	≤470mm	≤570mm	≤570mm
封刀尺寸: L*W(mm)Seal size	570×470	770×570	870×670	970×770
机器尺寸 (L×W×H) (mm) External Dimens ions	1780*850*1530	1980*950*1580	2180*1050*1630	2480*1150*1680
整机重量Weight	280kg	340kg	400KG	460KG
适用收缩膜Applicable shrink film	POF、PE	POF、PE	POF、PE	POF、PE

型 号 MODEL	CZL450D	CZL550D	CZL650D	CZL750D
电源电压 (V-Hz) Voltage	220V/50-60Hz	220V/50-60Hz	220V/50-60Hz	220V/50-60Hz
使用气源air source	6.0-8.0kg/cm ²	6.0-8.0kg/cm ²	6.0-8.0kg/cm ²	6.0-8.0kg/cm ²
功率 (Kw) Power	1.6KW	1.96KW	2.16KW	2.36KW
包装速度Packaging speed	25-40pcs/min	20-35pcs/min	20-35pcs/min	15-30pcs/min
包装产品高度Packaged product height	≤150mm	≤200	≤250	≤300
最大包装尺寸 L+H Maximum package size	≤450	≤600	≤700	≤800
最大包装尺寸 W+H Maximum package size	≤370mm	≤470mm	≤570mm	≤570mm
封刀尺寸: L*W(mm)Seal size	570×470	770×570	870×670	970×770
机器尺寸 (L×W×H) (mm) External Dimens ions	1780*1030*1450	1980*1130*1500	2180*1230*1550	2480*1330*1600
整机重量Weight	300kg	350kg	400KG	450KG
适用收缩膜Applicable shrink film	POF、PE	POF、PE	POF、PE	POF、PE

BFD450

全自动边封机（下放膜）
AUTOMATIC SIDE SEALING MACHINE (LOW FILM CRADLE)



BFD450



BFD450+BSG5030C



产品说明:

全自动边封包装机是我公司最新研发生产的最新品牌系列机型，它吸纳国内外先进的技术经验，是集科技、适用、品质于一体的新机型，是广泛应用于各类需要热收缩包装的理想设备。特别适合对长产品的批量性热收缩包装。本系列机型采用大品牌元器件，使用进口高精度传感器和精密电机，机器使用寿命长，包装效率高，包装能力强。配备智能触控一体屏，操作界面简洁明了，调节简单方便，员工易操作上手。整机采用下放膜结构，上下膜更方便。

Product description:

The fully automatic vertical L-shaped sealing and cutting packaging machine is a brand-new series of models developed and produced by our company. It absorbs advanced technical experience from home and abroad. It is a new model that integrates technology, applicability and quality. It is an ideal equipment widely used in various types of heat shrink packaging. This series of models adopts big brand components, imported high-precision sensors and precision motors. The machine has a long service life, high packaging efficiency and strong packaging capacity. It is equipped with an intelligent touch-screen system, with a simple and clear operation interface, simple and convenient adjustment, and easy for employees to operate.

BFX450

全自动高速边封机（下放膜）
AUTOMATIC HIGHSPEED SIDE SEALING MACHINE (LOW FILM CRADLE)



BFX450



BFX450+BSG5030C



产品说明:

全自动高速边封包装机是我公司最新研发生产的最新品牌系列高速机型，它吸纳国内外先进的技术经验，是集科技、适用、品质于一体的新机型，是广泛应用于各类需要热收缩包装的理想设备。特别适合对长产品的批量性热收缩包装。本系列机型采用大品牌元器件，使用进口高精度传感器和精密电机，机器使用寿命长，包装效率高，包装能力强。通过伺服马达控制封切刀，确保封切精度及封口线的结实的同时，更提升了包装速度；配备智能触控一体屏，操作界面简洁明了，调节简单方便，员工易操作上手。整机采用下放膜结构，上下膜更方便。

Product description:

The fully automatic high-speed side-seal packaging machine is a new brand series of high-speed machines developed and produced by our company. It absorbs advanced technical experience from home and abroad. It is a new model that integrates technology, applicability and quality. It is an ideal equipment widely used in various types of heat shrink packaging. It is especially suitable for batch heat shrink packaging of long products. This series of models adopts big brand components, imported high-precision sensors and precision motors, and has a long service life, high packaging efficiency and strong packaging capacity. The sealing and cutting knife is controlled by a servo motor to ensure the sealing and cutting accuracy and the firmness of the sealing line, while also improving the packaging speed; equipped with an intelligent touch-screen integrated screen, the operation interface is simple and clear, the adjustment is simple and convenient, and the employees can easily operate it. The whole machine adopts a low film cradle structure, which makes it more convenient to replace different films.

型 号 MODEL	BFD450	BFD550	BFD650	BFD750	BFD850	BFD950
电源电压 (V-Hz) Voltage	220V/50-60Hz	220V/50-60Hz	220V/50-60Hz	220V/50-60Hz	220V/50-60Hz	220V/50-60Hz
使用气源air source	6.0-8.0kgf/cm ²	6.0-8.0kgf/cm ²	6.0-8.0kgf/cm ²	6.0-8.0kgf/cm ²	6.0-8.0kgf/cm ²	6.0-8.0kgf/cm ²
功率 (Kw) Power	1.1KW	1.27KW	1.37KW	1.57KW	1.67KW	1.77KW
包装速度Packaging speed	30-50pcs/min	30-50pcs/min	30-40pcs/min	30-40pcs/min	20-30pcs/min	20-30pcs/min
最高通过产品尺寸 Maximum product passing size	≤150	≤200	≤250	≤300	≤350	≤400
最大包装尺寸W+HMaximum package size	≤400mm	≤500mm	≤600mm	≤700mm	≤1000mm	≤1100mm
封刀尺寸W (mm) Seal size	470	570	670	770	870	970
机器尺寸 (L×W×H) (mm) External Dimensions	1780*1030*1450	1980*1130*1500	2180*1230*1550	2380*1330*1600	2580*1430*1650	2780*1530*1700
整机重量Weight	300kg	350kg	400kg	450kg	500kg	550kg
适用收缩膜 Applicable shrink film	POF、PE	POF、PE	POF、PE	POF、PE	POF、PE	POF、PE

型 号 MODEL	BFX450
电源电压 (V-Hz) Voltage	220V/50-60Hz
使用气源air source	6.0-8.0kg/cm ²
功率 (Kw) Power	1.14KW
包装速度Packaging speed	20-30pcs/min
包装产品高度Packaged product height	≤200mm
最大包装尺寸 W+H Maximum package size	≤400mm
封刀尺寸W(mm)Seal size	470
机器尺寸 (L×W×H) (mm) External Dimensions	1730*1180*1260
整机重量Weight	240kg
适用收缩膜Applicable shrink film	POF、PE

型 号 MODEL	BSG5030CSL	BSN4522G
电源电压 (V-Hz) Voltage	380V/50-60Hz	380V/50-60Hz
功率 (Kw) Power	13.6KW	11KW
收缩炉尺寸 (L×W×H) (mm) Tunnel Size	1800*500*300	1500*450*220
通过产品尺寸 W×H(mm)Passing product dimension	400*200	300*150
输送速度 (PCS/H) Capacity	0-15米/分钟	0-15米/分钟
输送材质Transport material	栓条S	S、LW、T
输送载重Conveying load	25kg	10kg
机器尺寸 (L×W×H) (mm) External Dimensions	2100*980*1100	1900*610*1240
整机重量Weight	140KG	90KG
适用收缩膜Applicable shrink film	POF、PVC	POF、PVC

FQL SERIES 全自动L型套膜封切机

FULLY AUTOMATIC L TYPE FILM SEALING MACHINE



FQL450A



扫码看视频



FQL450A+BSN4020C



产品说明:

FQL-450系列封切机是一款全自动无人化操作的L型封切机, 广泛用于批量生产包装的流水作业, 工作效率高, 自动送膜打孔装置和手动调节的导膜系统以及手动调节的进料输送平台, 适用不同尺寸的产品。

- 1、封刀采用美国杜邦特弗龙涂层抗粘耐高温铝合金刀, 封口不会开裂, 不会焦化、不冒烟零污染。
- 2、自动送料, 长度亦能经由电眼和计时器的组合, 自动调节。配有感应马达, 自动卷取废料。
- 3、配有进口检测光电, 水平、垂直检测各一组, 便于切换选择, 对于薄与小的包装物, 可轻易完成封口包装作业。
- 4、温控器采用数显温控器, 内置PID功能, 封刀温度极为灵敏与精确, 可随意设定。封刀自身还带有自动保护功能, 有效防止误切包装物。
- 5、当包装物尺寸变更时, 调整非常简单, 不用换模具与制袋器。

- 6、该机封切部分装有有机玻璃保护罩, 并带有自动报警功能, 大大提高操作者的安全性。
- 7、整套机器真正实现与生产线的无人化操作连接。

适用范围:

适用于软件、食品、化妆品、印刷、制药及地板、陶瓷、饮料、五金等行业的特大批量收缩包装。

Product description:FQL-450 series sealing machine is a fully automatic operation of the L type sealCutting machine, widely used in mass production packaging line efficiencyHigh, automatic film feeding device and manual adjustment of the guiding film system and handDynamic adjustment of thefeeding conveyor platform, suitable for different sizes of products.

1,The use of the United States and the United States DuPont DuPont coated with anti - adhesive high temperature aluminum alloy knife,Sealing will not crack, no coking, no smoke zero pollution.

2, Automatic feeding length, also via a combination of electric eye and self timer.Dynamic regulation. Equipped with an induction motor, automatic coiling scrap.

3, Equipped with imported detection photoelectric, horizontal, vertical detection of each group, easy toSwitch to select, for thin and small packages, can be easily completed sealing bagLoading operation.

4, Temperature controller with digital temperature controller, built-in PID function, sealing knife temperatureExtremely sensitive and accurate, can be arbitrarily set. The seal itself is automaticProtection function, effectively prevent the false cut packaging.

5, When the packing size change, the adjustment is very simple, do not change the moldWith the bag.

6, The machine is equipped with the sealing part of the protective cover, and with automaticAlarm function, greatly improve the safety of the operator.

7, The whole set of machines and production lines to achieve the unmanned operation of the connection.Scope of application:Applicable to software, food, cosmetics, printing, pharmaceutical and floor, ceramicLarge volume shrink packaging for porcelain, beverage, metal and other industries.

CZL SERIES 高速垂直封切机

HIGH SPEED VERTICAL SEALING AND CUTTING MACHINE



扫码看视频

CZL450M



CZL450M+BSG5030



产品说明:

可搭配调速前端进料系统,及后端的储物工作平台,使整机动作真正实现高速化、无人化自动运行包装速度可以达到20-60件/分钟。

采用进口触摸屏, 各种设置、操作均可在触摸屏上轻松完成。

恒温加热封切系统可用于封切POF/PE等各种工业标准的收缩膜, 高速热风循环收缩炉采用滚轴式输送带,滚筒外包耐高温硅胶管。

采用光电对产品进行自动侦测,可进行三边封口。保证封切定位精确及封切线条优良。并可增加彩膜定位功能。

广泛适用于印刷品、书籍、软件、CD盒、足贴、电子烟、饼干、彩盒、化妆品、贺卡、相册、相框、医药、日化、地板、铝型材、木质品等大批量收缩包装的行业。

Product description:

It can be matched with the front-end feeding system of speed regulation and the storage working platform of the back-end, so that the whole machine can truly realize high-speed and unmanned automatic operation, and the packaging speed can reach 20-60 pieces / min.

Using imported touch screen, all kinds of settings and operations can be easily completed on the touch screen.

The constant temperature heating sealing and cutting system can be used for sealing and cutting POF / PE and other industrial standard shrink film.

The high-speed hot air circulation shrinkage furnace adopts roller conveyor belt, and the drum is wrapped with high temperature resistant silicone tube.

The product can be detected automatically by photoelectricity and sealed on three sides. Ensure accurate positioning and excellent sealing line. Color film positioning function can be added.

Widely used in printing, books, software, CD boxes, foot stickers, e-cigarettes, biscuits, color box cosmetics, greeting cards, photo albums, photo frames, medicine, daily chemicals, flooring, aluminum profiles, wood products and other mass shrink packaging industries.

型 号 MODEL	FQL450	FQL550
电源电压(V-Hz)Voltage	220/50-60Hz	220/50-60Hz
使用气源(kg/cm³)Air Pressure Required	6-8	6-8
功率(Kw)Power	1.35KW	1.5KW
包装速度(PCS/min)Capac ity	15-30bags/min	15-30bags/min
最大包装尺寸L+H(H<150mm)Maximum packing size	<500mm	<600mm
最大包装尺寸W+H(H<150mm)Maximum packing size	<400mm	<500mm
封刀尺寸L×W(mm)Cutter size	550×450	650×550
适用收缩膜Applicable shrinkage film	POF/PE	POF/PE
外形尺寸(L×W×H)(mm)External Dinens ions	1650x800 x1450	1750x900 x1450
净重 (kg) Net we ight	300	350

型 号 MODEL	CZL450M	型 号 MODEL	BSG5030
电源电压 (V-Hz) Voltage	220V/50-60Hz	电源电压 (V-Hz) Voltage	380V/50-60Hz
使用气源air source	6.0-8.0kgf/cm²	功率 (Kw) Power	13.6Kw
功率 (Kw) Power	1.5Kw	收缩炉尺寸 (L×W×H) (mm) Tunnel Size	1500×500×300
包装速度Packaging speed	0-35 bags/min	输送速度 (PCS/H) Capacity	0-15米/分钟
最大包装尺寸L Maximum package size	L+H≤500mm (H<160mm)	输送材质Transport material	链辊Roller Chain
最大包装尺寸W+H (H<150mm) Maximum package size	W小于350mm且W+H<400mm (H<160mm)	输送载重Conveying load	30KG
封刀尺寸L*W (mm) Seal size	570*470mm	机器尺寸(L×W×H)(mm) External Dimens ions	1800×880×1100
机器尺寸 (L×W×H) (mm) External Dimens ions	1800*900*1500mm	整机重量Weight	120kg
整机重量Weight	350kg		
适用收缩膜 Applicable shrink film	POF/PE		

CZL450 垂直封切机 VERTICAL SEALING AND CUTTING MACHINE



扫码看视频

CZL450



产品说明：

垂直上下快递袋打包机，适用于电商快递等打包发货。
自动化程度高，运料、包装、封切一次性完成，可实现快速高效，适用范围超广。
广泛适应于印刷行业、电子产品、电商行业、化妆品、医药、五金等大批量收缩包装的行业。
采用进口封刀，封口牢固、整齐美观强力撕也不好裂开。封刀温度灵敏精确，可根据产品设定。不必担心温度不精确伤及产品。封刀自身带有自动保护功能，有效防止误切包装物。采用国外进口配件，变频技术，包装过程中运行稳定。
横封切刀采用垂直系统驱动，刀外部镀有铁氟龙，不粘膜不裂口，封口牢固美观。
针轮设计新颖，打气孔调节方便。

Product description:

Vertical up and down express bag packer is suitable for e-commerce express delivery.
High degree of automation, transportation, packaging, sealing and cutting can be completed at one time, which can achieve fast
Speed and efficiency, wide application range.
It is widely used in printing industry, electronic products, e-commerce industry, cosmetics and medical industry
Pharmaceutical, hardware and other large-scale shrink packaging industry.
The imported sealing knife is used, the sealing is firm, neat and beautiful, and it is hard to crack when tearing.
The temperature of sealing knife is sensitive and accurate, which can be set according to the product. Don't worry about inaccurate temperature
Injury to the product.
The sealing knife has the function of automatic protection, which can effectively prevent the package from being cut by mistake
Load. Using imported accessories, frequency conversion technology, stable operation in the packaging process.
The transverse sealing cutter is driven by vertical system and coated with Teflon outside, without mucus
No crack, firm and beautiful seal.
The design of the needle wheel is novel, and the air hole is easy to adjust.

BF SERIES 全自动边封机 AUTOMATIC SIDE SEALING MACHINE



扫码看视频

BF 450



BF450+BSP4525



产品说明：

BF-450边封封切机适用于对产品进行全自动在线收缩包装，封口部分横刀采用垂直式驱动，纵刀采用恒温侧封刀，可选用自动进料或手工进料两种模式，采用对折薄膜并可对其进行三边封口。
技术特性：
BF-450边封封切机
1、纵封可持续性封口，包装产品长度不受限制。
2、包装速度可达20-40件/分钟。
3、封切由伺服马达控制，保证封切定位精确及封切线条优良。
4、封切刀带有自动保护功能，有效防止误切包装物。
适用范围：
适用于饼干、书籍、CD、玻璃制品、纸巾、卡片、相框、铝型材、木制品等产品单个包装或组合包装，适用于批量化的生产。

Product description:

BF-450 edge seal cutting machine is suitable for automatic online contraction of productsPackaging, sealing part of the vertical drive horizontal, longitudinal knife side by constant temperaturea knife can be used for automatic feeding or manual feeding of two modes, by halfthin film can be sealed by three sides.
Technical characteristics:
BF-450 edge seal cutting machine
1, Vertical closure of the seal, the length of the packaging products is not limited.
2, packing speed of up to 20-40 parts per minute.
3, Sealing and cutting by the servo motor control, to ensure that the sealing and cutting positioning precision and sealing lineExcellent article.
4, Sealing and cutting knife with automatic protection function, effectively prevent the false cutting of the packing material.
Scope of application:
Apply to cookies, books, CD, glass products, paper towels, cards, photo frame, Aluminum profiles, wood products and other products of a single packaging or packaging, applicable to the batchquantitative production.

型 号 MODEL	BF450	BF550
电源电压(V-Hz)Voltage	220/50-60Hz	220/50-60Hz
使用气源(kg/cm³)Air Pressure Required	6-8	6-8
功率(Kw)Power	1.35KW	1.5KW
包装速度(PCS/min)Capac ity	15-30bags/min	15-30bags/min
最大包装尺寸L+H(H<150mm)Maximum packing size	不限Unlimited	不限Unlimited
最大包装尺寸W+H(H<150mm)Maximum packing size	<400mm	<500mm (H150-250)
封刀尺寸L×W(mm)Cutter size	不限Unlimited×450	不限Unlimited×550
适用收缩膜Applicable shrinkage film	POF/PE	POF/PE
外形尺寸(L×W×H)(mm)External Dinens ions	1650x800 x1450	1750x900 x1450
净重 (kg) Net we ight	300	350

型 号 MODEL	CZL450A	CZL550M
电源电压 (V-Hz) Voltage	220V/50-60Hz	220V/50-60Hz
使用气源air source	6.0-8.0kgf/cm²	6.0-8.0kgf/cm²
功率 (Kw) Power	1.5Kw	1.5Kw
包装速度Packaging speed	0-35 bags/min	0-35 bags/min
最大包装尺寸L Maximum package size	L+H≤500mm (H<160mm)	L+H≤600mm (H<160mm)
最大包装尺寸W+H (H<150mm) Maximum package size	W小于350mm且W+H<400mm (H<160mm)	W小于450mm且W+H<500mm (H<160mm)
封刀尺寸L*W (mm) Seal size	570*470mm	670*570mm
机器尺寸 (L×W×H) (mm) External Dimens ions	1800*900*1500mm	2000*1000*1500mm
整机重量Weight	350kg	500kg
适用收缩膜 Applicable shrink film	POF/PE	POF/PE

高端定制大边封设备（接受各类非标定制）
HIGH-END CUSTOMIZED LARGE SIDE SEALING EQUIPMENT (NON-STANDARD CUSTOMIZATION ACCEPTED)



扫码看视频



- 产品说明：
针对超高类产品，或者超大型门板类产品，本公司可接受设备定制。
定制大型门板热收缩膜封切机，是全自动无人化操作的包装机，用于批量生产包装的流水作业，自动送膜打孔，自动套膜封切，自动卷取废料而且对包装物体的长度不限制。只需手动调节导膜系统以及手动调节进料输送平台，适用不同宽度及高度的产品即可。可与自动化包装流水线配套使用。
- 性能特点：
- 1.封刀采用特弗龙涂层抗粘铝合金刀，封口不会开裂，不会焦化、不冒烟。
 - 2.采用数显温控器，内置PID功能，封刀温度极为灵敏，可随意设定。
 - 3.自动送膜，长度亦能经由电眼和计时器的组合，自动调节。
 - 4.封刀带有自动保护功能，有效防止误切包装物保障人员安全。
 - 5.整套机器真正实现与生产线的无人化操作连接。
 - 6.使用知名电气元件，减少使用故障提高系统稳定性。

- Product description:
For ultra-high products or ultra-large door panel products, our company can accept equipment customization.
Customized large-scale door panel heat shrinkable film sealing and cutting machine is a fully automatic and unmanned packaging machine. It is used for mass production and packaging flow operations. It can automatically feed and punch holes in the film, automatically seal and cut the film, automatically take up waste materials and control the length of the packaging object. not limited. You only need to manually adjust the film guide system and manually adjust the feeding and conveying platform to suit products of different widths and heights. Can be used in conjunction with automated packaging lines.
- Performance features:
1. The sealing knife is made of Teflon-coated anti-stick aluminum alloy knife. The seal will not crack, scorch or smoke.
 2. It adopts digital display temperature controller and built-in PID function. The sealing knife temperature is extremely sensitive and can be set at will.
 3. Automatic film feeding, the length can also be automatically adjusted through the combination of electric eye and timer.
 4. The sealing knife has an automatic protection function, which effectively prevents accidental cutting of packaging materials and ensures personnel safety.
 5. The entire machine is truly connected to the production line for unmanned operation.
 6. Use well-known electrical components to reduce faults and improve system stability.
 7. Automatic mode and manual mode can be switched at any time.
 8. Adopt PLC+touch screen design.

型 号 MODEL	BF950R	BF1100T
电源电压 (V-Hz) Voltage	220V/50-60Hz	220V/50-60Hz
使用气源air source	6.0-8.0kgf/cm ²	6.0-8.0kgf/cm ²
功率 (Kw) Power	2.41Kw	2.5Kw
包装速度Packaging speed	15-30 bags/min	15-30 bags/min
最大包装尺寸高H Maximum package size	≤500mm	≤200mm
最大包装尺寸横宽W+H Maximum package size	≤1150mm	≤1200mm
封刀尺寸L*W (mm) 横 Seal size	长不限Infinite length × 1050mm	长不限Infinite length × 1100mm
机器尺寸 (长×宽×高) (mm) External Dimensions	超高类产品Supertall product	门板类产品Door panel products
机器尺寸 (长×宽×加高) (mm) External Dimensions	3000 × 2010 × 1710mm	2650 × 2020 × 1350mm
整机重量Weight	650kg	750kg
适用收缩膜 Applicable shrink film	POF/PE	POF/PE

TFZ650 全自动直进料袖口式包装机
AULL AUTOMATIC STRAIGHT FEEDING CUFF PACKING MACHINE



扫码看视频

TFZ650



TFZ650+BSP6040



- 适用范围：
主要适用于长度较长物体或饮料、啤酒、矿泉水、易拉罐、玻璃瓶等有纸托、纸箱的集合或单一收缩包装。
- 产品说明：
- 1、TFZ650 全自动直进料袖口式包装机，采用独特的直线式设计，结构紧凑占地面积，针对一些场地受限及包装过程中无需调整产品前进方向，十分方便，不会受包装物长度的限制。
 - 2、可独立工作，也可与生产线对接自动进料、裹膜、封切、收缩、冷却、定型，无人化流水作业。
 - 3、该机引进国外先进技术及工艺制作，设备性能稳定可靠。
 - 4、采用OMRON “PLC” 可编程序控制器，实现机、电、气一体化。
 - 5、经过特殊的改装后，包装轻及小的产品时都能轻松运过。
 - 6、该机与普通侧进料机器相比，有速度和衔接上的优势。
 - 7、采用特别设计的封刀，封口线牢固、不开裂、不易粘刀。
 - 8、采用进口光电，准确定位，针对产品设计二组水平检测光电。
 - 9、原装进口输送皮带，经久耐用，传送速度由变频器控制，可无级变速。
 - 10、封切时后端配有压料装置，对于包装较轻的物品，亦都不会发生移位。

- Scope of application:
Mainly suitable for long objects or drinks, beer, mineral water, cans, glass bottles and paper tray,Collection or single shrink packing of carton.
- Product description:
- 1, TFZ650 full automatic straight feeding cuff packing machine, using a unique linear design, compact structureIn the area of the area, the direction of the product is not needed to be adjusted during the process of the packing and the packing, and is very convenient,Will not be limited by the length of the package.
 - 2,Can work independently, but also with the production line of automatic feeding, wrapping film, sealing and cutting, shrinkage, cooling, setType of unmanned assembly.
 - 3,The introduction of foreign advanced technology and production technology, equipment, stable and reliable performance.
 - 4,Using OMRON "PLC" programmable logic controller, realize the integration of machine, electricity and gas.
 - 5,After special modification, the packaging of light and small products can easily be shipped.
 - 6,Compared with the common side feeding machine, the machine has the advantages of speed and convergence.
 - 7,The use of special design of the seal, sealing line is firm, not cracking, not easy to stick knife.
 - 8,The use of imported photoelectric, accurate positioning,product design for the two groups of level detection.
 - 9,The original import conveyor belt, durable, the transmission speed is controlled by the frequency converter, can be infinitely variable speed.
 - 10,The back end of the seal cutting with a press device, for the lighter items, will not shift.

型 号 MODEL	TFZ650	TFZ750
电源电压(V-Hz)Voltage	220V50-60Hz	220V50-60Hz
功率(Kw)Power	1.65KW	1.85KW
工作气压 (Kg/cm³) Compressed Air	6-8	6-8
最大包装尺寸Maximum packing size(L × W × H)	不限(Unlimited) × 450 × 400mm	不限(Unlimited) × 550 × 400mm
最大封口长度Maximum sealing size	650mm	750mm
包装速度(PCS/min)Packing speed	0-22	0-22
进料工作水平高度Infeed Conveyor Height	750±50	750±50
适用收缩膜Applicable shrinkage film	PVC/PE	PVC/PE
机器尺寸(L × W × H)External Dimensions	1760 × 940 × 1760mm	1760 × 1040 × 1760mm
净重Net weight(kg)	280	330

TFB650 半自动套膜封切包装机 SEMI-AUTOMATIC SLEEVE SEALLING MACHINE



扫码看视频

TFB650



TFB650+BSP6040



适用范围:

适用于饮料、啤酒、矿泉水等有纸托或无纸托的集合包装，也可用于电器、汽车零件、家私、地板等单个或多个组合的封切、热缩包装。

产品说明:

- 1、TFB650采用原装进口气缸，使推料和封切时平稳。
- 2、采用特别设计的封刀，封口线牢固、不开裂、不易粘刀。
- 3、使用原装进口电气元件，减少使用过程中的故障。
- 4、隐蔽式的气缸装置，大大增加操作的方便性，后端的压料装置，保证包装轻的物品时不会发生移位。
- 5、包装不同形状规格的产品，前端的定位框架可任意调整。

Scope of application:

Suitable for drinks, beer, mineral water, such as paper or no paper care collection of packaging, can also be used for electrical appliances, Auto parts, furniture, flooring and other single or multiple combinations of sealing and heat shrinkable packaging.

Product description:

- 1, TFB650 imported original cylinder, so that the smooth feeding and sealing.
- 2, The use of special design of the seal, sealing line is firm, not cracking, not easy to stick knife.
- 3, The use of imported electrical components, to reduce the use of the process of failure.
- 4, Concealed cylinder device, greatly increasing the convenience of operation, the back end of the pressing device, there is no shift in the light of the cards.
- 5, The packaging of different shapes and specifications of the product, the front end of the positioning framework can be arbitrarily adjusted.

TFT650 全自动套膜封切机(有底托) FULL AUTOMATIC SLEEVE SEALLING MACHINE(WITHOUT TRAY)



扫码看视频

TFT650



TFT650+BSP6040



适用范围:

适用于饮料、啤酒、矿泉水、易拉罐、玻璃瓶有纸托、纸箱等集合或单一收缩包装。

产品说明:

- 1、TFT650全自动袖口式包装机是针对单个物体或有纸托的物品而设计，此机可与生产线对接自动进料、裹膜、封切、收缩、冷却定型，实现无人化流水作业。
- 2、TFT650引进国际先进技术及工艺制作，设备性能稳定可靠。
- 3、感应式送膜，大大减少薄膜的损耗。
- 4、原厂欧姆龙数显式温控器，温度精确，可直接看到封切时的温度状态。
- 5、无级机械式调速装置，调整进料输送带的速度。
- 6、采用OMRON“PLC”可编程程序控制器，实现机、电、气一体化。
- 7、采用特别设计的三片式封刀，封口线牢固、不开裂、不易粘刀。
- 8、输送采用变频器控制传送速度，无级调速。

Scope of application:

For drinks, beer, mineral water, cans, glass bottles, cartons and other paper tray collection or single packaging.

Product description:

- 1, TFT650 full automatic cuff packing machine is designed for a single object or a piece of paper, this machine can connect with the production line of automatic feeding, wrapping film, sealing and cutting, shrinkage, cooling and shaping, realize unmanned assembly.
- 2, TFT650 the introduction of international advanced technology and production technology, equipment, stable and reliable performance.
- 3, Induction type to send film, greatly reduce the loss of the film.
- 4, The original OMRON digital temperature controller, the temperature is accurate, can directly see the temperature of the seal cutting.
- 5, Stepless mechanical speed control device, adjust the feed conveyor belt speed.
- 6, Using OMRON "PLC" programmable logic controller, realize the integration of machine, electricity and gas.
- 7, The use of special design of three pieces of sealing, sealing line is firm, not cracking, not easy to stick knife.
- 8, The transmission adopts frequency converter to control the transmission speed, stepless speed regulation.

型 号 MODEL	TFB650	TFB750
电源电压(V-Hz)Voltage	220V50-60Hz	220V50-60Hz
功率(Kw)Power	1.4KW	1.6KW
工作气压 (Kg/cm³) Compressed Air	6-8	6-8
最大包装尺寸Maximum packing size(L × W × H)	340 × 450 × 330mm	540 × 550 × 430mm
最大封口长度Maximum sealing size	650mm	750mm
包装速度(PCS/min)Packing speed	0-10	0-10
进料工作水平高度Infeed Conveyor Height	750±50	750±50
适用收缩膜Applicable shrinkage film	PVC/PE	PVC/PE
机器尺寸(L × W × H)External Dimensions	950 × 920 × 1760mm	1070 × 1030 × 1760mm
净重Net weight(kg)	180kg	220kg

型 号 MODEL	TFT 650	TFT 750
电源电压(V-Hz)Voltage	380V50-60Hz	380V50-60Hz
功率(Kw)Power	1.5KW	1.5KW
工作气压 (Kg/cm³) Compressed Air	6-8	6-8
最大包装尺寸Maximum packing size(L × W × H)	500 × 400 × 350mm	600 × 500 × 350mm
最大封口长度Maximum sealing size	650mm	750mm
包装速度(PCS/min)Packing speed	0-18	0-18
进料工作水平高度Infeed Conveyor Height	800±50	800±50
适用收缩膜Applicable shrinkage film	PVC/PE	PVC/PE
机器尺寸(L × W × H)External Dimensions	1400 × 2700 × 2000mm	1500 × 2800 × 2000mm
净重Net weight(kg)	350	400

TFQ 650

全自动整列套膜封切机(无底托)
FULL AUTOMATIC WHOLE SET FILM SEALING MACHINE (ON BOTTOM BRACKET)



扫码看视频

TFQ650



TFQ650+BSP6050



产品说明:

- 1、TFQ 650全自动袖口式包装机是针对单个物体或无底托产品而设计，此机与生产线对接自动进料、裹膜、封切、收缩、冷却定型，无需人工操作的自动化包装设备。可做到6瓶（2×3）、8瓶（2×4）、9瓶（3×3）、12瓶（3×4）、15瓶（3×5）、18瓶（3×6）、20瓶（4×5）、24瓶（4×6）等多种包装形式。
- 2、TFQ 650引进国外先进技术及工艺制作，设备性能稳定可靠。
- 3、采用OMRON“PLC”可编程程序控制器，实现机、电、气一体化。
- 4、该机可根据生产要求进行两排、三排、四排等有底托或无底托热缩包装，更换包装形式时，只需转换面板上的转换开关。
- 5、采用蜗轮蜗杆减速机，进料输送与送膜时平稳无抖动。
- 6、采用特别设计的封刀，封口线牢固、不开裂、不易粘刀；塑钢材质输送带耐磨损，强度高。
- 7、可根据瓶形选择自动送料装置。
- 8、包装彩膜时，需增加色标定位系统，准确定位。
- 9、模块式设计，更换不同瓶形，亦能瞬间完成。
- 10、进料输送带可根据现场的需要设计成左侧进料或右侧进料的方式。

Product description:

- 1, TFQ 650 full automatic cuff packing machine is designed for a single object or a non bottom care products, this machine and studentsThe production line and the automatic packaging of the automatic feeding, wrapping film, sealing and cutting, shrinking, cooling, and no manual operation are required.Equipment. Can be done 6 bottles (2 x 3), 8 bottles (2 x 4), 9 bottles (x 3), 12 bottles (3 x 4), 15 bottles of bottles (x 3).(3 x 5), 18 bottles (3 x 6), 20 bottles (4 x 5), 24 bottles (4 * 6), and other packaging forms.
- 2, TFQ 650 the introduction of foreign advanced technology and production technology, equipment, stable and reliable performance.
- 3,Using OMRON "PLC" programmable logic controller, realize the integration of machine, electricity and gas.
- 4,The machine can be carried out in two rows, three rows, four rows, with or without bottom support machinethermoforming packaging according to production requirements, and moreWhen changing the packing form, only the conversion switch on the panel is required.
- 5,Using worm gear and worm reducer, feeding and feeding of the film when the smooth without jitter.
- 6,Using a specially designed sealing knife, sealing line firmly, no crack, not easy to stick a knife; plastic material conveyor belt resistanceWear, high strength.
- 7,According to the bottle shape selection automatic feeding device.
- 8, Packaging color film, increase the color positioning system, accurate positioning.
- 9, Modular design, the replacement of different bottles, can also be completed in an instant.
- 10,Feeding conveyor belt can be designed according to the needs of the scene into the left side feeding or right feeding way.


BSG 5030SL

高速恒温收缩机
HIGH SPEED THERMOSTATIC SHRINKING MACHINE



扫码看视频

BSG5050SL



产品说明:

- 1、采用进口的大电流固态继电器无触点输出，配备专用SSR散热器，散热效率大幅提高，有效地延长其使用寿命。
- 2、发热部件采用优质不锈钢发热管，确保整个系统的高稳定性和可靠性，更能保证较长的使用寿命。
- 3、结合温控器特有的PID模糊控制功能，一直监视外界温度及热量值的变化，以最小脉冲控制发热管，快速做出反应，保证温控精度,机内温度分布误差极小。
- 4、进口大功率高速运风电机，匹配进口变频器控制运风电机转速，可根据不同产品及收缩膜材质来改变炉内热风大小。
- 5、输送带驱动电机采用进口减速电机，匹配进口变频器调速，驱动扭力大，输送载重量大，输送速度运行平稳。
- 6、整机组件模块化设计，结构紧凑，维护保护方便。
- 7、炉内嵌装耐高温照明灯泡，可通过机器侧面玻璃观察窗口查看炉内产品收缩效果，以便实际收缩过程中来调整机器的各项操控数据。
- 8、采用独立滚轮结构及托平支撑，结合链辊，运行平稳，速度可达+/-10mm/min。
- 9、延时开关机保护功能，停机后均匀降温，有防防止因不均匀降温而产生的部件变形。

Product description:

1. The imported high current solid state relay has no contact output and is equipped with special SSR radiator, which greatly improves the heat dissipation efficiency and effectively extends its service life.
2. High quality stainless steel heating pipe is used for heating parts to ensure high stability and reliability of the whole system and long service life.
3. Combined with the unique PID fuzzy control function of the temperature controller, it has been monitoring the changes of the external temperature and heat value, controlling the heating tube with the minimum pulse to make a quick response, ensuring the temperature control accuracy, and minimizing the internal temperature distribution error.
4. Imported high-power high-speed air transport motor, matching with imported frequency converter to control the speed of air transport motor, the size of hot air in the furnace can be changed according to different products and shrink film materials.
5. The drive motor of conveyor belt adopts imported speed reducing motor, which is matched with imported frequency converter for speed regulation. The drive torque is large, the conveying load is large, and the conveying speed runs smoothly.
6. Modular design, compact structure, convenient maintenance and protection.
7. High temperature resistant lighting bulb is embedded in the furnace. The shrinkage effect of products in the furnace can be viewed through the glass observation window on the side of the machine, so as to adjust the control data of the machine in the actual shrinkage process.
8. Independent roller structure and support, combined with chain roller, running smoothly, speed up to + / - 10 mm / min.
9. It has the function of time-delay on-off protection, which can reduce the temperature evenly after shutdown, and prevent the deformation of cattle parts due to uneven cooling.

型 号 MODEL	BSG5030SL
电源电压 (V-Hz) Voltage	380V/50-60Hz
功率 (Kw) Power	13.6Kw
收缩炉尺寸 (L×W×H) (mm) Tunnel Size	1500×500×300
输送速度 (PCS/H) Capacity	0-15米/分钟
输送材质Transport material	链辊Roller Chain
输送载重Conveying load	30KG
机器尺寸(L×W×H)(mm) External Dimens ions	1800×880×1100
整机重量Weight	120kg

型 号 MODEL	TFQ 650	TFQ 750
电源电压(V-Hz)Voltage	220V50-60Hz	220V50-60Hz
功率(Kw)Power	1.5KW	1.5KW
工作气压 (Kg/cm³) Compressed Air	6-8	6-8
最大包装尺寸Maximum packing size(L×W×H)	500×400×380mm	600×500×380mm
最大封口长度Maximum sealing size	650mm	750mm
包装速度(PCS/min)Packing speed	0-10	0-10
进料工作水平高度Infeed Conveyor Height	800±50	800±50
适用收缩膜Applicable shrinkage film	PVC/PE	PVC/PE
机器尺寸(L×W×H)External Dimensions	1400×2700×2000mm	1500×2800×2000mm
净重Net weight(kg)	300	350

BSN SERIES

内循环式热收缩包装机
INTERNAL CIRCULATING TYPE HEAT SHRINK PACKAGING MACHINE



BSN4020C



BSN4020CK



扫码看视频

产品说明:

机器造型美观、质量稳定、安全节能、专利产品、全国首创,适合PVC PP POF膜收缩包装效果完美。

技术特点:

- 1.外观及结构按照国家标准设计,机身采用耐指纹板制作后喷塑。
- 2.操控面板采用编程系统,12V直流输入,按键开关,数码显示。
- 3.输送采用24V直流减速电机,调速采用变频技术0-9档调节。
- 4.输送带可选用钢丝网带,链辊,特氟龙网带三款。
- 5.加温采用220V 600W远红外线石英加热管。
- 6.温控采用高精度智能温控仪系统,上下温度独立调节。
- 7.热风循环采用220V 60W 2200转长轴电机配装风轮。
- 8.脚架可拆卸式,脚架高度可调节。
- 9.加长型包装效果更完美、更高效节能。

Product description:

Beautiful machine, stable quality, safety, energy saving, patented products, domestic initiative; applicable to the POF PVC PP film thermal shrink packaging effect is perfect.

Features:

- 1.Appearance and knot design in accordance with national standards, the fuselage uses fingerprint resistant sheet production after spray treatment.
- 2.Control panel using programming system, 12V DC input, button switch, digital display.
- 3.Transmission using 24V DC motor speed control using variable frequency technology 0-9 file adjustment.
- 4.The conveyor belt can be used wire mesh belt, chain roller, Teflon mesh belt three.
- 5.Heating using 600W 220V far infrared quartz heating tube.
- 6.Temperature control using high precision intelligent temperature control system, up and down temperature independent regulation.
- 7.Hot air circulation using 220V 60W 2200 to the long axis motor with wind wheel.
- 8.The bracket can be disassembled, and the height of the bracket can be adjusted.
- 9.longer type packaging effect is more perfect, more efficient and energy saving.

附注: 配脚架工作台高低可调范围55-75CM 尺寸: 长X宽X高

型 号 MODEL	BSN4020C	BSN5030	BSN6030
电源电压(V-Hz)Voltage	380V50-60Hz	380V/50-60Hz	380V/50-60Hz
功率(Kw)Power	9KW	11KW	11KW
输送速度(PCS/h)Capacity	0-15m/min	0-15m/min	0-15m/min
收缩炉尺寸(L × W × H)(mm)Tunnel Size	1200 × 400 × 200mm	1200 × 500 × 300mm	1200 × 600 × 300mm
产品尺寸(W × H)(mm)Product size	350 × 150mm	450 × 250mm	550 × 250mm
输送材质Transport material	网带Mesh belt、链辊Roller chain、特氟龙Teflon		
输送载重Conveying load	10kg Max.	10kg Max.	10kg Max.
机器尺寸(L × W × H)(mm)External Dimensions	1600 × 560 × 660mm	1600 × 660 × 760mm	1600 × 760 × 760mm
机器重量weight	80kg	90kg	100kg
适用收缩膜Applicable shrinkage film	PE, POF, PVC, PP	PE, POF, PVC, PP	PE, POF, PVC, PP

BSP SERIES

喷气式热收缩包装机
JET TYPE HEAT SHRINK PACKAGING MACHINE



BSP4525



扫码看视频



BSP4525C (可定制)

产品说明:

BSP系列设有缺相、错相、短路自动故障安全警报。采用不锈钢加热器, 大功率送风电机, 使收缩炉升温快、风量大、风均匀, 根据产品尺寸大小、产量高低可调节输送带速度和炉腔温度, 以达到最佳收缩效果。

- 1、电子调速器任意调整输送带的传送速度快慢。
- 2、采用双层隔热装置, 机器外表不会太热。
- 3、耐高温隔热帘布, 大大减少热能损耗。
- 4、输送链采用实心滚轴、外部包耐高温硅胶管, 能承受大重量的物体且滚轴不会变形。

使用范围:

适合PVC、PP、POF等各类收缩薄膜。

Product description:

BSP series with the lack of phase, phase error, short circuit automatic fault safety alarm. Mining With stainless steel heater, high power supply of wind motor, so that the temperature of shrinkage furnace heating up quickly, The air quantity is big, the wind is even, according to the size of the product, the quantity of the product can be adjusted. Conveyor belt speed and furnace chamber temperature to achieve the best effect of contraction.

- 1, Electronic speed governor to adjust the speed of conveyor belt conveyor speed.
- 2, Using a double layer heat insulation device, the appearance of the machine is not too hot.
- 3, High temperature insulation cord, greatly reduce the heat loss.
- 4, The use of solid conveying chain roller, covered by silica gel ube, Can bear heavy objects and would not be distorted.

Range of use:

Suitable for PVC, PP, POF and other types of shrink film.

附注: 配脚架工作台高低可调范围55-75CM 尺寸: 长X宽X高

型 号 MODEL	BSP4525	BSP4525C	BSP5035
电源电压(V-Hz)Voltage	380V50-60Hz	380V/50-60Hz	380V/50-60Hz
功率(Kw)Power	13KW	19KW	13KW
输送速度(PCS/h)Capacity	0-15m/min	0-15m/min	0-15m/min
收缩炉尺寸(L × W × H)(mm)Tunnel Size	1200 × 450 × 250mm	1800 × 450 × 250mm	1200 × 500 × 350mm
产品尺寸Product size	400 × 200mm	400 × 200mm	450 × 300mm
输送材质Transport material	网带Mesh belt、链辊Roller chain、特氟龙Teflon		
输送载重Conveying load	25kg Max.	25kg Max.	25kg Max.
机器尺寸(L × W × H)(mm)External Dimensions	1510 × 700 × 1380mm	2110 × 700 × 1380mm	1510 × 750 × 1480mm
机器重量weight	185kg	220kg	200kg
适用收缩膜Applicable shrinkage film	PE, POF, PVC, PP	PE, POF, PVC, PP	PE, POF, PVC, PP

BSP SERIES 喷气式热收缩包装机

JET TYPE HEAT SHRINK PACKAGING MACHINE



扫码看视频

BSP6040



BSP11040(可定制)

产品说明:

BSP系列设有缺相、错相、短路自动故障安全警报。采用不锈钢加热器，大功率送风电机，使收缩炉升温快、风量大、风均匀，根据产品尺寸大小、产量高低可调节输送带速度和炉腔温度，以达到最佳收缩效果。

- 1、电子调速器任意调整输送带的传送速度快慢。
- 2、采用双层隔热装置，机器外表不会太热。
- 3、耐高温隔热帘布，大大减少热能损耗。
- 4、输送链采用实心滚轴、外部包耐高温硅胶管，能承受大重量的物体且滚轴不会变形。
- 5、可选配前后无动力滚筒或工作台。

使用范围:

适合PVC、PP、POF等各类收缩薄膜。

Product description:

BSP series with the lack of phase, phase error, short circuit automatic fault safety alarm. MiningWith stainless steel heater, high power supply of wind motor, so that the temperature of shrinkage furnace heating up quickly, The air quantity is big, the wind is even, according to the size of the product, the quantity of the product can be adjusted. Conveyor belt speed and furnace chamber temperature to achieve the best effect of contraction.

- 1, Electronic speed governor to adjust the speed of conveyor belt conveyor speed.
- 2, Using a double layer heat insulation device, the appearance of the machine is not too hot.
- 3, High temperature insulation cord, greatly reduce the heat loss.
- 4, The use of solid conveying chain roller, covered by silica gel ube, Can bear heavy objects and would not be distorted.
- 5, Can be selected before and after the no power roller or working table.

Range of use:

Suitable for PVC, PP, POF and other types of shrink film.

附注：配脚架工作台高低可调范围55-75CM 尺寸：长X宽X高

型 号 MODEL	BSP6040	BSP11040(可定制)
电源电压(V-Hz)Voltage	380V/50-60Hz	380V/50-60Hz
功率(Kw)Power	18KW	39KW
输送速度(PCS/h)Capacity	0-15m/min	0-15m/min
收缩炉尺寸(L × W × H)(mm)Tunnel Size	1800 × 600 × 400mm	1800 × 1100 × 400mm
产品尺寸Product size	550 × 350mm	1050 × 350mm
输送材质Transport material	网带Mesh belt、链辊Roller chain、特氟龙Teflon	
输送载重Conveying load	25kg Max.	50kg Max.
机器尺寸(L × W × H)(mm)External Dimensions	2500 × 900 × 1650mm	2500 × 1400 × 1750mm
机器重量weight	420kg	700kg
适用收缩膜Applicable shrinkage film	PE, POF, PVC, PP	PE, POF, PVC, PP

XY-590 全自动枕式高速热收缩包装机

PILLOW TYPE HIGH SPEED SHRINK WRAPPING MACHINE



扫码看视频



特别推荐:

■ 本机采用的是日本技术，全部使用进口电器元件，是在日本先进的技术和丰富的经验中诞生的高速自动包装机。

■ 本机操作简单，质量可靠，性能稳定。变频调速，无级变速。整机的控制集中由PLC完成，减少了故障点。热收缩炉高效双温区，无极调速，自动控温。高效热风循环，保证收缩质量。

性能特点:

■ 彩色触摸屏控制系统，采用三个伺服电机驱动，整机操作方便，稳定性高，包装效率高，故障率低；袋长，速度与温度均可单独调整，操作方便，准确。

■ 防切安全离合装置，不损坏包装物。

■ 高感度光电眼色标跟踪,数字化输入封切位置，使封切位置更加准确。

■ 温度独立PID控制，更好适合各种包膜材质。

■ 定位停机功能，不粘刀，不浪费包膜。

■ 传动系统简洁，工作更可靠，维护保养更方便。

■ 切到产品自动反转，重启后直接开机方便操作。

■ 增加废料回收装置，使包装更美观，比传统的对折膜包装机节省材料约20%-30%。

■ 可配备打码机或喷码机，无需使用人工。

■ 具有电机刹车控制，设备反应灵敏。

■ 热收缩炉高效双温区,高效热风循环，自动温控,保证收缩质量。

■ 适应范围:食品、药品、饮料成组包装、碗面、奶茶、蚊香、墙纸、练习本、滤清器、电气开关、保鲜膜、垃圾袋、各种文具、工业零件和日用化妆品贴体包装等。

主要技术参数

最大膜宽Max Flim size	≤590mm			
型 号 Model	120	150	180	210
包装尺寸 Packing size	L:60mm-320mm	L:100mm-450mm	L:150mm-530mm	L:180mm-600mm
	W:10mm-200mm	W:10mm-200mm	W:10mm-200mm	W:10mm-200mm
	H:5mm-35mm	H:5mm-70mm	H:50mm-110mm	H:80mm-135mm
包装速度Packing speed	30-150(包/分)	30-150(包/分)	30-130(包/分)	30-100(包/分)
薄膜种类 Flim type	PVC;POF等热收缩膜			
额定功率 Power consumption	3.6KW+16.5KW			
电 源 Power supply	主机:220V,50HZ/60HZ;收缩机:380V,50HZ/60HZ			
主机尺寸Envelop dimensions	5000 × 1105 × 1450mm			
收缩机 Shrinking machine	2400 × 600 × 1700mm			
整机重量 Weight	主机: 1000KG		收缩机:600KG	

根据包装物和包装要求不同，具体技术参数会有所变化，以双方确认的技术参数为准。

XY-350/350X/450/450X 回转式枕包机

ROTARY PILLOW MACHINE



扫码看视频

一、适用范围

适合于食品、五金、玩具、药品、工业用品、生活用品等各类有规则物体的包装。

二、主要性能和结构特点

- 1.双变频器控制，袋长即设即切，无需调节空走，一步到位,省时省膜。
- 2.人机界面，参数设定方便快捷。
- 3.故障自诊断功能,故障显示一目了然。
- 4.高感度光电眼色标跟踪，数字化输入封切位置,使封切位置更加准确。
- 5.温度独立PID控制,更好适合各种包装材质。
- 6.定位停机功能,不粘刀,不浪费包膜。
- 7.传动系统简洁,工作更可靠,维护保养更方便。
- 8.所有控制由软件实现，方便功能调整和技术升级,永不落后。

Scope of application

It is suitable for the packaging of food, hardware, toys, rugs, industrial products, daily necessities and all kinds of regular objects.Two. Main performance and structural features

- 1.Double inverter control, the bag length is set or cut,no need to adjust the empty walk, one step in place,save time and provincial membrane.
- 2.Man-machine interface, the parameter setting is convenient and quick.
- 3.Fault self diagnosis function, fault display at a glance.
- 4.High sensitivity photoelectric eye color mark tracking, digital input cutting position, so that the sealing cutting position is more accurate.
- 5.Temperature independent PID control, better suitable for all kinds of packaging material.
6. Position stop function, no sticky knife, no waste film.
- 7.The transmission system is simple, the work is more reliable, the maintenance is more convenient.
- 8.All controls are implemented by software, convenient for functional adjustment and technical upgrading, and neverlag behind.

主要技术参数

型号 Model	XY-350X/XY-350			XY-450X/XY-450
膜宽 Film width	Max.340mm			Max.440mm
袋长 Pocket length (皮带尾架最长没有限制) (There is no limit on the longest belt tail frame)	双刀 (推子尾架) Double cutter	65-190mm	90-220mm	推子尾架Fader tail frame: 180-450mm
	单刀 (推子尾架) Single cutter	120-280mm	150-330mm	皮带尾架: 180mm- (最长没有限制) Belt tail frame: 180mm- (Max. No limit)
袋宽 Pocket width	50-160mm			80-200mm
产品高度 Product height	低刀最高Low cutter highs.45mm		高刀最高 Highest knife.60mm	80-100mm
最大卷膜直径 Maximum film diameter	Max.320mm			Max.320mm
包装速度 Packaging speed	5-25米/分钟 (皮带尾架) / 40-230包/分钟 (推子尾架) 5-25m/min (belt tailstock) / 40-230 bags/min (fender tailstock)			5-25米/分钟 (皮带尾架) / 40-80包/分钟 (推子尾架) 5-25m/min (belt tailstock) / 40-80 bags/min (fender tailstock)
电源电压 (V-Hz)Voltage	220V,50/60HZ,2.6KW			220V,50/60HZ,2.8KW
机器尺寸 (L×W×H) (mm) External Dimensions	3533*765*1312mm (皮带尾架) Belt tailstock 4011*765*1312mm (推子尾架) Fader tail rack			3594*860*1100mm (皮带尾架) Belt tailstock 3744*860*1100mm (推子尾架) Fader tail rack
机器重量Weight	350KG			450KG

三维透明膜包装机

THREE DIMENSIONAL TRANSPARENT FILM PACKAGING MACHINE



扫码看视频

XY-260型



扫码看视频

XY-180D型

产品说明:

该机(需自备空压机)系适用材料为玻璃纸PVC和BOPP薄膜,对不同规格的方形的硬纸包装盒、包装品进行三维包装的通用设备。透明纸(膜)与一条印有图文或全息激光标志的折封拉线,经不干胶粘贴后,可方便制成品折封和防伪之功能。

本机适用于药品、保健品、营养滋补品、食品、日化化妆品、文具用品、VCD磁带、扑克、香烟等各种小型的方形物品的裹包,是一种理想的盒式三维包装设备。

性能结构与特点:

包装速度可调,包装尺寸可调(需更换模具),热封温度可调

功能(二防三提高):二防:防伪/防潮

三提高:提高产品的附加值/提高产品的档次/提高产品的装潢品质

Product description:

This machine (extra air compressor is needed) is a general equipment suitable for three-dimensional packaging of square cardboard packaging boxes and packaging products of different specifications. The applicable materials are cellophane PVC and BOPP film. Transparent paper (film) and a folding and sealing string printed with graphics or holographic laser marks, after being pasted with self-adhesive adhesive, can facilitate the folding and sealing of finished products and prevent counterfeiting.

This machine is suitable for wrapping various small square items such as medicines, health products, nutritional supplements, food, daily cosmetics, stationery, VCD tapes, pokers, cigarettes, etc. It is an ideal box-type three-dimensional packaging equipment.

Performance structure and features:

Packaging speed is adjustable, packaging size is adjustable (mold needs to be replaced), heat sealing temperature is adjustable

Functions (two defenses and three improvements):

Second defense: anti-counterfeiting/moisture-proof

Three improvements: increase the added value of the product/improve the grade of the product/improve the decorative quality of the product.

产品说明:

该机采用气动式工作原理(需客户自行提供气源),适用材料为玻璃纸PVC和BOPP薄膜,对不同规格的方形的硬纸包装盒、包装品进行三维包装的通用设备。是利用手工将一张切好的印有图文或全息激光标志的折封拉线透明膜缠到被包装品上,经不干胶粘贴后,可方便制成品折封和防伪之功能的产品。

本机适用于药品、保健品、营养滋补品、食品、日化化妆品、文具用品、VCD磁带、扑克、香烟等各种不同规格的方形物品的裹包,是一种理想的盒式三维包装设备。

性能结构与特点:

包装尺寸可调,热封温度可调

功能(二防三提高):二防:防伪/防潮

三提高:提高产品的附加值/提高产品的档次/提高产品的装潢品质

Product description:

This machine adopts a pneumatic working principle (customers need to provide their own air source). The applicable materials are cellophane, PVC and BOPP films. It is a general equipment for three-dimensional packaging of square cardboard boxes and packaging products of different specifications. It is to manually wrap a piece of folding and sealing transparent film printed with graphics or holographic laser marks on the packaged goods. After being pasted with a self-adhesive adhesive, it can facilitate the folding and anti-counterfeiting functions of the finished product. product.

This machine is suitable for wrapping various square items of different specifications such as medicines, health products, nutritional supplements, food, daily cosmetics, stationery, VCD tapes, pokers, cigarettes, etc. It is an ideal box-type three-dimensional packaging equipment. .

Performance structure and features:

The packaging size is adjustable and the heat sealing temperature is adjustable

Functions (two defenses and three improvements):

Second defense: anti-counterfeiting/moisture-proof

Three improvements: increase the added value of the product/improve the grade of the product/improve the decorative quality of the product

型号 MODEL	XY-260型	XY-180D型
生产效率Production efficiency	20-80包/分 Package/min	≤20包/分 Package/min
包装尺寸范围Package size range	(L)40-180mm(W)30-110mm(H)10-60mm	(L)60-290mm(W)30-180mm(H)10-70mm
电源电压 (V-Hz) Voltage	220V 50 - 60Hz	220V 50 - 60Hz
功率 (Kw) Power	4.25Kw	2.8Kw
机器尺寸 (L×W×H) (mm) External Dimensions	2400mm × 800mm × 1600mm(L × W × H)	1750mm × 600mm × 800mm(L × W × H)视规格而定
整机重量Weight	600Kg	180Kg

三维透明膜包装机

THREE DIMENSIONAL TRANSPARENT FILM PACKAGING MACHINE



扫码看视频

XY-200型



扫码看视频

XY-220D型

产品说明:

该机(需自备空压机)是我厂吸收国内三维包装机的优点及客户的使用中遇到的一些问题而自行研发出来的改进型设备。是多种规格产品包装客户的理想选择。本机适用于药品、保健品、营养滋补品、食品、日用化妆品、文具用品、VCD磁带、扑克、香烟等各种小型的方形物品的裹包,是一种理想的盒式三维包装设备。

性能结构与特点:

包装速度可调,无需大范围更换模具即可实现该机型包装范围内不同规格的产品包装,热封温度可调

功能(二防三提高):二防:防伪/防潮

三提高:提高产品的附加值/提高产品的档次/提高产品的装潢品质

Product description:

This machine (extra air compressor is needed) is an improved equipment developed by our factory by absorbing the advantages of domestic three-dimensional packaging machines and some problems encountered by customers in their use. It is an ideal choice for customers packaging products of various specifications.

This machine is suitable for wrapping various small square items such as medicines, health care products, nutritional supplements, food, daily cosmetics, stationery, VCD tapes, pokers, cigarettes, etc. It is an ideal box-type three-dimensional packaging equipment.

Performance structure and features:

The packaging speed is adjustable, and products of different specifications within the packaging range of this model can be packaged without extensive replacement of molds. The heat sealing temperature is adjustable.

Functions (two defenses and three improvements):

Second defense: anti-counterfeiting/moisture-proof

Three improvements: increase the added value of the product/improve the grade of the product/improve the decorative quality of the product

产品说明:

该机(需客户自备空压机)是我厂吸收国内三维包装机的优点及客户的使用中遇到的一些问题而自行研发出来的改进型设备。是多种规格产品包装客户的理想选择。

本机适用于药品、保健品、营养滋补品、食品、日用化妆品、文具用品、VCD磁带、扑克、香烟等各种小型的方形物品的裹包,是一种理想的盒式三维包装设备。

性能结构与特点:

包装速度可调,无需大范围更换模具即可实现该机型包装范围内不同规格的产品包装,热封温度可调,增加六面烫功能,包装更加美观。

功能(二防三提高):二防:防伪/防潮

三提高:提高产品的附加值/提高产品的档次/提高产品的装潢品质

Product description:

This machine (extra air compressor is needed) is an improved equipment developed by our factory by absorbing the advantages of domestic three-dimensional packaging machines and some problems encountered by customers in their use. It is an ideal choice for customers packaging products of various specifications.

This machine is suitable for wrapping various small square items such as medicines, health care products, nutritional supplements, food, daily cosmetics, stationery, VCD tapes, pokers, cigarettes, etc. It is an ideal box-type three-dimensional packaging equipment.

Performance structure and features:

The packaging speed is adjustable, and products of different specifications within the packaging range of this model can be packaged without extensive replacement of molds. The heat sealing temperature is adjustable, and the six-sided ironing function is added to make the packaging more beautiful.

Functions (two defenses and three improvements):

Second defense: anti-counterfeiting/moisture-proof

Three improvements: increase the added value of the product/improve the grade of the product/improve the decorative quality of the product

XY-4030 自动封箱机

AUTOMATIC CARTON SEALING MACHINE



扫码看视频

XY-4030



产品说明:

封箱机是一种常用的包装机械,使用BOPP即粘胶带(也叫封箱胶带)对纸箱进行封箱,可上、下两面同时封箱,包装速度快、效率高、美观大方。

轻巧耐用,操作简单;侧面皮带驱动,适用较窄纸箱;上下皮带驱动,适用于较高纸箱;封箱机节省劳动力,减少开箱现象。连线使用可配套折盖封箱机,单台使用可选用半自动封箱机。

两侧辅助轮协助机器封箱时中缝集中不开裂。台面高度、纸箱宽度高度可自主调节,简单实用。造型典雅大方,配备刀片防护装置,避免操作时意外刺伤。机件稳固耐用,使用寿命长。

机身自带四个高强度刹车轮,换位工作非常方便。

Product description:

The carton sealing machine is a commonly used packaging machine that uses BOPP instant adhesive tape (also called sealing tape) to seal cartons. It can seal the upper and lower sides at the same time. The packaging is fast, efficient, and beautiful.

Light and durable, easy to operate; side belt drive, suitable for narrower cartons; upper and lower belt drive, suitable for taller cartons; the carton sealing machine saves labor and reduces the phenomenon of unpacking. For online use, it can be equipped with a folding carton sealing machine, and for single use, a semi-automatic carton sealing machine can be used.

The auxiliary wheels on both sides help the machine seal the cartons in a concentrated manner without cracking. The table height, carton width and height can be adjusted independently, which is simple and practical. Elegant and generous in shape, it is equipped with a blade guard to avoid accidental stabbing during operation. The machine parts are stable and durable, with long service life. The fuselage comes with four high-strength brake wheels, making it very convenient to change positions.

型号 MODEL	XY-200型	XY-220D型
生产效率Production efficiency	20-80包/分 Package/min	10-50包/分 Package/min
包装尺寸范围Package size range	(L)30-160mm(W)20-80mm(H)10-30mm	(L)60-200mm(W)30-130mm(H)20-70mm
电源电压(V-Hz) Voltage	220V 50-60Hz	220V 50-60Hz
功率(Kw) Power	3.5Kw	4.5Kw
机器外形尺寸(LxWxH)(mm) External Dimensions	2300mm x 720mm x 1550mm(L x W x H)	3200mm x 2200mm x 1650mm(L x W x H)
输送带尺寸Conveyor belt size		1500mm x 140mm x 800mm(L x W x H)
六面烫尺寸Six sides of ironing size		1000 x 500 x 840mm(L x W x H)
整机重量Weight	350Kg	600Kg

型号 MODEL	XY4030	XY5050	XY6050
电源电压(V-Hz) Voltage	220V 50-60Hz		
功率(w) Power	200W		
包装速度(PCS/min)Packing speed	10-20 PCs/Min		
适用纸箱 Sealing Size (mm)	L130(Min.) x W80-300 x H90-400	L130(Min.) x W80-500 x H90-500	L130(Min.) x W180-500 x H160-600
台面高度 (Table Height)	530-730mm		
胶带宽度 (Tape Width)	≤50mm	≤50mm	≤70mm

RF-770 连续式自动封口机 CONTINUOUS AUTOMATIC SEALING MACHINE




扫码看视频



RF-770A

型号区别



RF-770A



RF-770B



产品说明:

770系列塑料薄膜连续封口机适用于小包装的封口，采用电子恒温控制和无级调速的传动机构，可以自动连续封合多种材料的塑料薄膜，根据需要还可以配置压痕印字轮及计数装置

适用范围:

广泛适用于食品、医药、农业、日化等，包括茶叶袋、牛皮袋、铝箔袋、阴阳袋等

性能特点:

- 1、数显温控仪精确控制；
- 2、采用大功率纯铜电机；

Product description:

The 770 series plastic film continuous sealing machine is suitable for sealing small packages. It adopts electronic constant temperature control and stepless speed regulation transmission mechanism. It can automatically and continuously seal plastic films of various materials. It can also be equipped with indentation printing wheels and counting as needed. device

Scope of application:

Widely used in food, medicine, agriculture, daily chemicals, etc., including tea bags, cowhide bags, aluminum foil bags, yin and yang bags, etc.

Performance features:

1. Precise control by digital display temperature controller;
2. Use high-power pure copper motor;

DQ320L 气调保鲜包装机 MODIFIED ATMOSPHERE PACKING



扫码看视频

DQ320L



设备关键配置:

- 1.304不锈钢主体和外壳。
- 2.优质铝材6061阳极氧化。
- 3.众德真空泵。
- 4.新元智能控制系统。
- 5.台湾威纶通触摸屏。
- 6.欧姆龙和松下传感器。
- 7.施耐德和正泰电器开关。
- 8.亚德客气缸。
- 9.双手胀轴收膜系统。
- 10.台湾全重电机。

Key equipment configuration:

1. 304 stainless steel body and shell.
2. High quality aluminum 6061 anodized.
3. Zhongde vacuum pump.
4. Xinyuan intelligent control system.
5. Taiwan wintone touch screen.
6. Omron and Panasonic sensors.
7. Schneider and Chint electrical switches.
8. AirTAC cylinder.
9. Double hand expanding shaft film collecting system.
10. Taiwan full weight motor.

型 号 MODEL	RF-770A	RF-770B
电源电压(V-Hz) Voltage	220V/50HZ	
功率(w) Power	600W	500W
包装速度Packing speed	0-16m/min	
封口宽度Seal Width	12-15mm	
封口厚度Sealing Thickness	0.02-0.80mm	
载重Conveyor Load	15 Kg	10 Kg
外形尺寸Item Dimension	895 × 420 × 345mm	895 × 420 × 345mm

型 号 MODEL	DQ320L-V	DQ320L-E
卷膜最大宽度(mm)Maximum width	320	320
卷膜最大直径(mm)Maximum diameter	220	220
包装速度(times/min)Packaging speed	3~4	5 ~ 6
真空泵排量(m3/h)Displacement of vacuum pump	40	——
电源(v/hz)Power Supply	380/50	220/50
总功率(kw)Total power	2.4	1.5
工作压力(Mpa)Working pressure	0.6 ~ 0.8	0.6 ~ 0.8
设备重量(kg)Equipment weight	160	125
包装毛重(kg)Gross weight of package	188	164
设备尺寸(mm)Equipment size	1020 × 920 × 1400	1020 × 920 × 1400
包装箱尺寸(mm)Box size	1350 × 1220 × 1600	1350 × 1220 × 1600

XY-260T 台式系列真空机

TABLE-STYLE VACUUM PACKAGING MACHINE



扫码看视频

XY-260T



XY-300T



产品说明:

台式真空包装机结构紧凑，适合在较为狭窄的场地或需要经常移动的场地工作操作简单，该机只需按下真空室盖即可按设定的程序完成抽真空，经抽真空包装的物品在密封的状态下可防止氧化、霉变、虫蛀、受潮、延长成品存储期限。存储的时间更长，并可以保持包装物的色泽不变。采用电脑板控制，确保可靠的包装效果单室系列均采用透明有机玻璃，可监控整个抽真空过程。该机型外壳和真空室由不锈钢制作，真空盖由有机盖制作。

Product Description:

The desktop vacuum packaging machine is compact in structure, and it is suitable for working in a narrow site or a place that needs to be moved frequently. The machine can complete vacuum pumping according to the set procedure only by pressing the vacuum chamber cover. The articles packed by vacuum can prevent oxidation, mildew, worm, moisture and extend the storage period of finished products under the sealed condition. The storage time is longer and the color of the package can be kept unchanged. The computer board control is adopted to ensure the reliable packaging effect of single room series are made of transparent organic glass, which can monitor the whole vacuum pumping process. The shell and vacuum chamber of the machine are made of stainless steel, and the vacuum cover is made of organic cover.

XY-400 单室真空包装机

SINGLE CHAMBER VACUUM PACKAGING MACHINE




扫码看视频

XY-400





拉伸：一体成型，经久耐用



焊接：机体焊接而成

焊接与拉伸的区别



75mm与200mm可选

产品说明:

单室真空包装机，适合在比较狭窄的场地或需要经常移动的场地工作操作简便，该机只需按下真空室盖即可按设定的程序完成抽真空，经抽真空包装的物品在密封的状态下可防止氧化、霉变、虫蛀、受潮、延长成品存储期限。在抽真空后充入惰性气体，存储的时间更长，并可以保持包装物的色泽不变。真空包装机的电器控制系统分为：继电器自动控制系统和电脑板自动控制系统两类，确保可靠的包装效果单室系列均采用透明有机玻璃，可监控整个抽真空过程，该机型外壳和真空室由不锈钢制作，真空盖由有机玻璃制作。可配置填充垫板，满足不同高度包装物的需求。

Product Description:

The single chamber vacuum packaging machine is suitable for working in narrow sites or sites that need to be moved frequently. It is easy to operate. The machine can complete the vacuum pumping according to the set procedure by pressing the vacuum chamber cover. The vacuum packed articles can prevent oxidation, mildew, moth, damp and extend the storage life of finished products under the sealed state. After vacuumizing, it can be filled with inert gas for longer storage time and keep the color of the package unchanged. The electrical control system of vacuum packaging machine is divided into relay automatic control system and computer board automatic control system to ensure reliable packaging effect. The single room series adopts transparent plexiglass, which can monitor the whole vacuum pumping process. The shell and vacuum chamber of the machine are made of stainless steel, and the vacuum cover is made of plexiglass. It can be equipped with padding plate to meet the needs of different packaging height.

型 号 MODEL	XY-260T	XY-300T	XY-400T
电源电压(V-Hz)Voltage	AC 110V/60HZ 220V/50HZ	AC 110V/60HZ 220V/50HZ	AC220/50
真空泵电机功率(Kw)Motor Power	180	370	1000
热封功率(W)Sealing Power	300	300	500
真空极限(Kpa)Ultimate Vacuum Pressure	1	1	1
每室热封条数No. of Sealing Bars for Each Chamber	1	1	2
热封长度(mm)Heat seal length	260	300	400
热封宽度(mm) Heat seal width	10	10	10
物品最大长度(mm) Maximum length of item	350	350	350
真空室尺寸(L × W × H)(mm)Chamber Dimension	390 × 285 × 55	390 × 325 × 55	435 × 420 × 75
真空泵排气量(m³/h)Exhaust volume	8	14	20
真空室材质Material of vacuum chamber	304不锈钢	201不锈钢	201不锈钢
净重(kg)Net weight	31.6	34	59
毛重(kg)Gross weight	38	44	69
外形尺寸(L × W × H)(mm)Dimensions	510 × 350 × 390	510 × 370 × 390	540 × 490 × 540
外箱尺寸(L × W × H)(mm)Outer box size	520 × 390 × 400	520 × 420 × 400	560 × 540 × 560

型 号 MODEL	XY-400	XY-500	XY-600
电源电压(V-Hz)Voltage	AC 110V/60HZ 220V/50HZ	AC 110V/60HZ 220V/50HZ	AC220/50
真空泵电机功率(Kw)Motor Power	900	900	1000
热封功率(W)Sealing Power	500	600	1000
真空极限(Kpa)Ultimate Vacuum Pressure	1	1	1
每室热封条数No. of Sealing Bars for Each Chamber	2	2	2
热封长度(mm)Heat seal length	400	500	600
热封宽度(mm) Heat seal width	10	10	10
物品最大长度(mm) Maximum length of item	350	430	
真空室尺寸(L × W × H)(mm)Chamber Dimension	420 × 440 × 75	520 × 520 × 75	630 × 630 × 100
真空泵排气量(m³/h)Exhaust volume	20/20	20/20	20
真空室材质Material of vacuum chamber	不锈钢	不锈钢	201不锈钢
净重(kg)Net weight	69.5	75	111
毛重(kg)Gross weight	90	96	
外形尺寸(L × W × H)(mm)Dimensions	550 × 490 × 970	652 × 78 × 982	760 × 690 × 980
外箱尺寸(L × W × H)(mm)Outer box size	620 × 575 × 1045	680 × 610 × 1050	780 × 740 × 1000

XY-400/2S


双室真空包装机
DOUBLE CHAMBER VACUUM PACKAGING MACHINE



扫码看视频



XY-400/2S

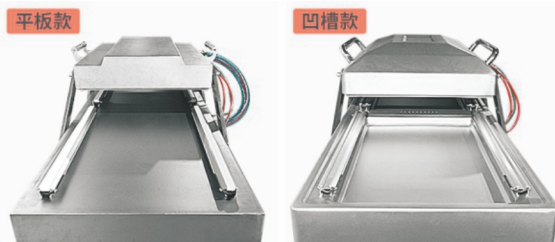

凹槽与平板的区别



产品说明:

400机型较大, 可以包装较大的物品, 也可以完成较多的小件包装。适合较大规模连续生产的需求, 工作效率高。可配置填充垫板, 满足不同物的包装物的需求, 提高包装效率。可以加充气功能, 真空包装机的电气控制系统分为: 继电器自动控制系统和电脑板自动控制系统两类, 用户采用时可自动选定。操作简便, 该机只需按下真空室盖即可按设定的程序完成抽真空双室真空包装机, 两真空室交替使用, 工作效率高; 经抽真空包装机的物品在密封的状态下可防止氧化、霉变、虫蛀、受潮、延长成品存储期限。在抽真空后充入隋性气体, 存储的时间更长, 并可以保持包装的色泽不变。可配置粉尘过滤器, 用于粉料产品的真空包装。机身材质, 工作室深度。真空泵排气量可根据客户需求定制。500/600系列可配置两台或三台20m/h真空泵或一个40m/h真空泵, 或一个63m/h真空泵或一个100m/h真空泵。

Product Description:

The 400 model is larger, so it can pack larger items or complete more small pieces. Suitable for large-scale continuous production needs, high efficiency. It can be equipped with filling pad to meet the needs of different packaging materials and improve the packaging efficiency. The electric control system of vacuum packaging machine can be divided into relay automatic control system and computer board automatic control system, which can be selected automatically by users. It is easy to operate. The machine only needs to press the cover of the vacuum chamber to complete the vacuum pumping according to the set program. The two vacuum chambers are used alternately and the working efficiency is high; The vacuum packaging machine can prevent oxidation, mildew, moth, damp and extend the storage life of finished products under the sealed state. The storage time is longer and the color of the package can be kept unchanged after vacuumizing. Dust filter can be configured for vacuum packaging of powder products. Fuselage material, studio depth. The discharge volume of vacuum pump can be customized according to customer's demand. The 500 / 600 series can be equipped with two or three 20m / h vacuum pumps, one 40m / h vacuum pump, one 63m / h vacuum pump or one 100M / h vacuum pump.

XY-600/2E

单室大米茶叶真空包装机
RICE/TEA VACUUM PACKAGING MACHINE



XY-600/2E



扫码看视频



XY-850/2E

产品说明:

单室真空包装机, 适合在比较狭窄的场地或需要经常移动的场地工作操作简便, 该机只需按下真空室盖即可按设定的程序完成抽真空, 经抽真空包装的物品在密封的状态下可防止氧化、霉变、虫蛀、受潮、延长成品存储期限。在抽真空后充入隋性气体, 存储的时间更长, 并可以保持包装物的色泽不变。真空包装机的电器控制系统分为: 继电器自动控制系统和电脑板自动控制系统两类, 确保可靠的包装效果单室系列均采用透明有机玻璃, 可监控整个抽真空过程, 该机型外壳和真空室由不锈钢制作, 真空盖由有机玻璃制作。可配置填充垫板, 满足不同高度包装物的需求。

Product Description:

The single chamber vacuum packaging machine is suitable for working in narrow sites or sites that need to be moved frequently. It is easy to operate. The machine can complete the vacuum pumping according to the set procedure by pressing the vacuum chamber cover. The vacuum packed articles can prevent oxidation, mildew, moth, damp and extend the storage life of finished products under the sealed state. After vacuumizing, it can be filled with inert gas for longer storage time and keep the color of the package unchanged. The electrical control system of vacuum packaging machine is divided into relay automatic control system and computer board automatic control system to ensure reliable packaging effect. The single room series adopts transparent plexiglass, which can monitor the whole vacuum pumping process. The shell and vacuum chamber of the machine are made of stainless steel, and the vacuum cover is made of plexiglass. It can be equipped with padding plate to meet the needs of different packaging height.

型 号 MODEL	XY-600/2E	XY-850/2E
电源电压(V-Hz)Voltage	AC220/50	AC220/50
真空泵电机功率(Kw)Motor Power	1000	1000
热封功率(W)Sealing Power	1200	1600
真空极限(Kpa)Ultimate Vacuum Pressure	1	1
每室热封条数No. of Sealing Bars for Each Chamber	2	2
热封长度(mm)Heat seal length	660	850
热封宽度(mm) Heat seal width	10	10
真空室尺寸(L × W × H)(mm)Chamber Dimension	680 × 210 × 350	900 × 210 × 350
真空泵排气量(m³/h)Exhaust volume	20 × 1	20 × 1
真空室材质Material of vacuum chamber	201不锈钢	201不锈钢
净重(kg)Net weight	88	100
外形尺寸(L × W × H)(mm)Dimensions	740 × 480 × 800	930 × 450 × 800

XY-600

不锈钢外抽卧式

HORIZONTAL EXTERNAL VACUUM PACKAGING MACHINE (ELECTRIC PUMP DRIVEN)



扫码看视频

600不锈钢外抽卧式(电动)



600不锈钢外抽卧式(气动)

型 号 MODEL	600不锈钢外抽卧式
电源电压(V-Hz)Voltage	220/50HZ
真空泵电机功率(Kw)Motor Power	0.36KW
热封功率(W)Sealing Power	0.95KW
抽气速率Vacuum Pump Rate	6.5m ³ /h
充气速率Compress Air Requirement	0.85mpa
热封长度(mm)Heat seal length	600mm
热封宽度(mm) Heat seal width	10mm
外形尺寸(L × W × H)(mm)Dimensions	640*500*930mm
整机重量Net Weight	54kg

产品说明:

本系列设备以塑料或塑料铝箔复合膜为包装材料, 对各种仪器药品粮食、酱菜、果脯、水产品、土特产、化工原料、电子元件及军用品等不限固体、粉状、糊状或液体均可进行真空热封包装, 且真空度极高, 可有效防止脂类产品氧化而引起物品腐败和变质, 达到保质、保鲜、保味、保色的功能, 延长产品的储存期限, 同时对松软的物品, 经过真空包装后缩小物品体积, 便于运输及储存。

Product Description:

Using plastic or plastic aluminum foil composite film as packaging material, this series of equipment can carry out vacuum heat sealing packaging for all kinds of instruments, medicines, Cereals, pickles, preserved fruits, aquatic products, local products, chemical raw materials, electronic components, military products and other unlimited solids, powders, pastes or liquids, and the vacuum degree is very high, which can effectively prevent lipid products from being oxidized to cause corruption and deterioration, It has the functions of quality, freshness, taste and color preservation, prolongs the storage life of products, and reduces the volume of soft goods after vacuum packaging, which is convenient for transportation and storage.

XY-1100

连续滚动式真空包装机

XY-1100 SINGLE SEALED CONTINUOUS BELT TYPE VACUUM PACKAGING MACHINE



扫码看视频

XY-1100连续滚动式真空包装机

产品说明:

本系列设备以塑料或塑料铝箔复合膜为包装材料, 对各种仪器药品粮食、酱菜、果脯、水产品、土特产、化工原料、电子元件及军用品等不限固体、粉状、糊状或液体均可进行真空热封包装, 且真空度极高, 可有效防止脂类产品氧化而引起物品腐败和变质, 达到保质、保鲜、保味、保色的功能, 延长产品的储存期限, 同时对松软的物品, 经过真空包装后缩小物品体积, 便于运输及储存。

Product Description:

Using plastic or plastic aluminum foil composite film as packaging material, this series of equipment can carry out vacuum heat sealing packaging for all kinds of instruments, medicines, Cereals, pickles, preserved fruits, aquatic products, local products, chemical raw materials, electronic components, military products and other unlimited solids, powders, pastes or liquids, and the vacuum degree is very high, which can effectively prevent lipid products from being oxidized to cause corruption and deterioration, It has the functions of quality, freshness, taste and color preservation, prolongs the storage life of products, and reduces the volume of soft goods after vacuum packaging, which is convenient for transportation and storage.

型 号 MODEL	1100连续滚动式真空包装机
电源电压(V-Hz)Voltage	AC380/50
真空泵电机功率(Kw)Motor Power	3000
热封功率(W)Sealing Power	2000
真空室最低绝对压强(Kpa)Ultimate Vacuum Pressure	1
每室热封条数(pcs)No. of Sealing Bars for Each Chamber	1
真空室内尺寸(LxWxH)(mm)Chamber Dimension	1170 × 510 × 120
热封条长度(mm)Sealing Length	1100
热封宽度 (mm)Sealing Width	8
真空泵排气量(m ³ /h)Vacuum Pump Rate	100
真空室材质Material for Vacuum Chamber	304不锈钢
外形尺寸 (LxWxH)(mm)Dimension	1950 × 1630 × 1300
净重(kg)Net Weight	460
最大包装物尺寸 (mm)Max Size of Packed Goods	1100*330*80
最大包装袋子尺寸(mm)Max Size of Packing Bag	1100*400

无人化后道包装系统 UNMANNED ROAD PACKAGING SYSTEM

我们可根据您的特殊情况，
设计最具效率的无人化包装系统。
We can according to your special circumstances,
Design the most efficient unmanned packaging system.

